



TECHNICAL DATASHEET

BFH 351

CONTACT US:

1 Grande rue
54540 MONTIGNY, France
Tel: +33 3 83 42 15 79




WWW.PLAISANCE-EQUIPEMENTS.COM

BFH 351

GENERAL INFORMATION

Rotor widths	1m	1,2 m
Rotor diameter	470 mm	
Use	Forestry mulching on hydraulic excavator	
Teeth	Single or double carbide tips ; Special steel teeth	
Teeth position on the rotor	Fixed - Helical and V positions	
Excavator weight	11 to 18 tons	
Side belt transmission to rotor	1 Continental® Eagle belt	
Curtain of chains	Anti-projection curtain of chains	
Protection door	Hydraulic with one heavy duty cylinder	
Safety	Anti-shock, anti-cavitation valves	
Frame	High tensile steel	
Roller bearings holders	Mass cut steel bearing casing	
Skids	HARDOX 450® soles	
Counter blade	HARDOX® counter knives, inside frame	
Rotor protections	Anti-wire, bolted and interchangeable cut in mass	
Hydraulic engine	According to excavator capacity	
Hydraulic flow/pressure	We adapt the hydraulic motor to your flow rates and pressures to optimize power and achieve maximum efficiency	

HOLDERS

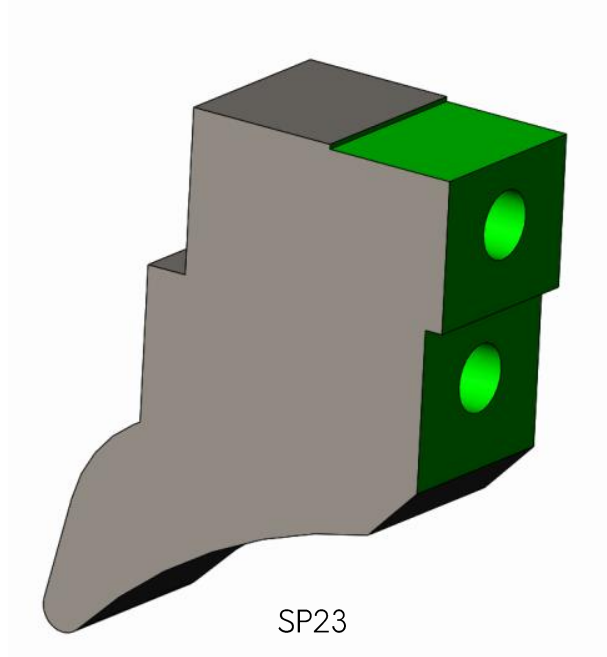

TEETH



Wood tool
Single carb tip


OF5
40 to 50 teeth



Wood tool
Double carb tip


OF6
20 to 25 teeth

HOLDERS

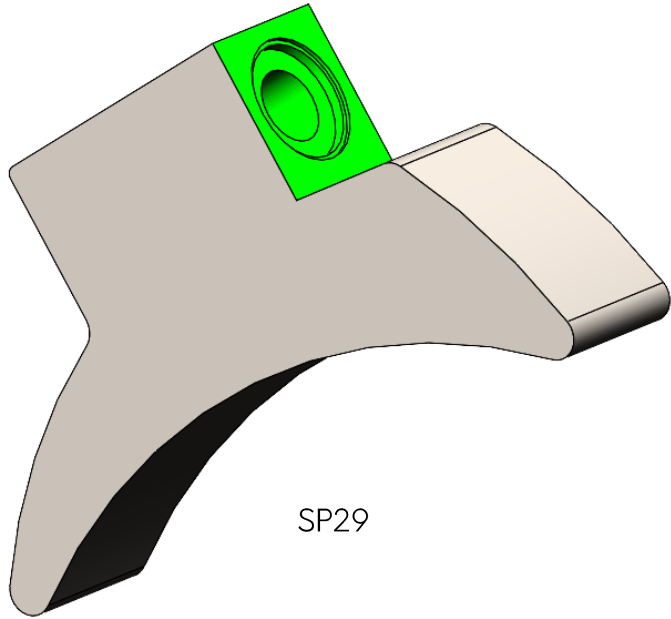

SP29

TEETH

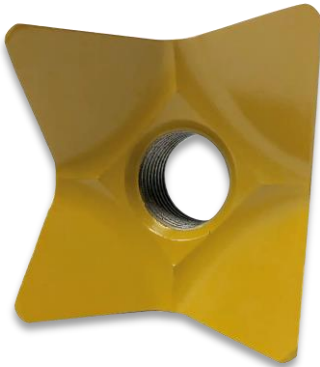

Wood tool
MXcut


OFMX1
25 to 30 teeth



Wood tool
Double carb tip


OF12
25 to 30 teeth

PLAN AND DIMENSIONS

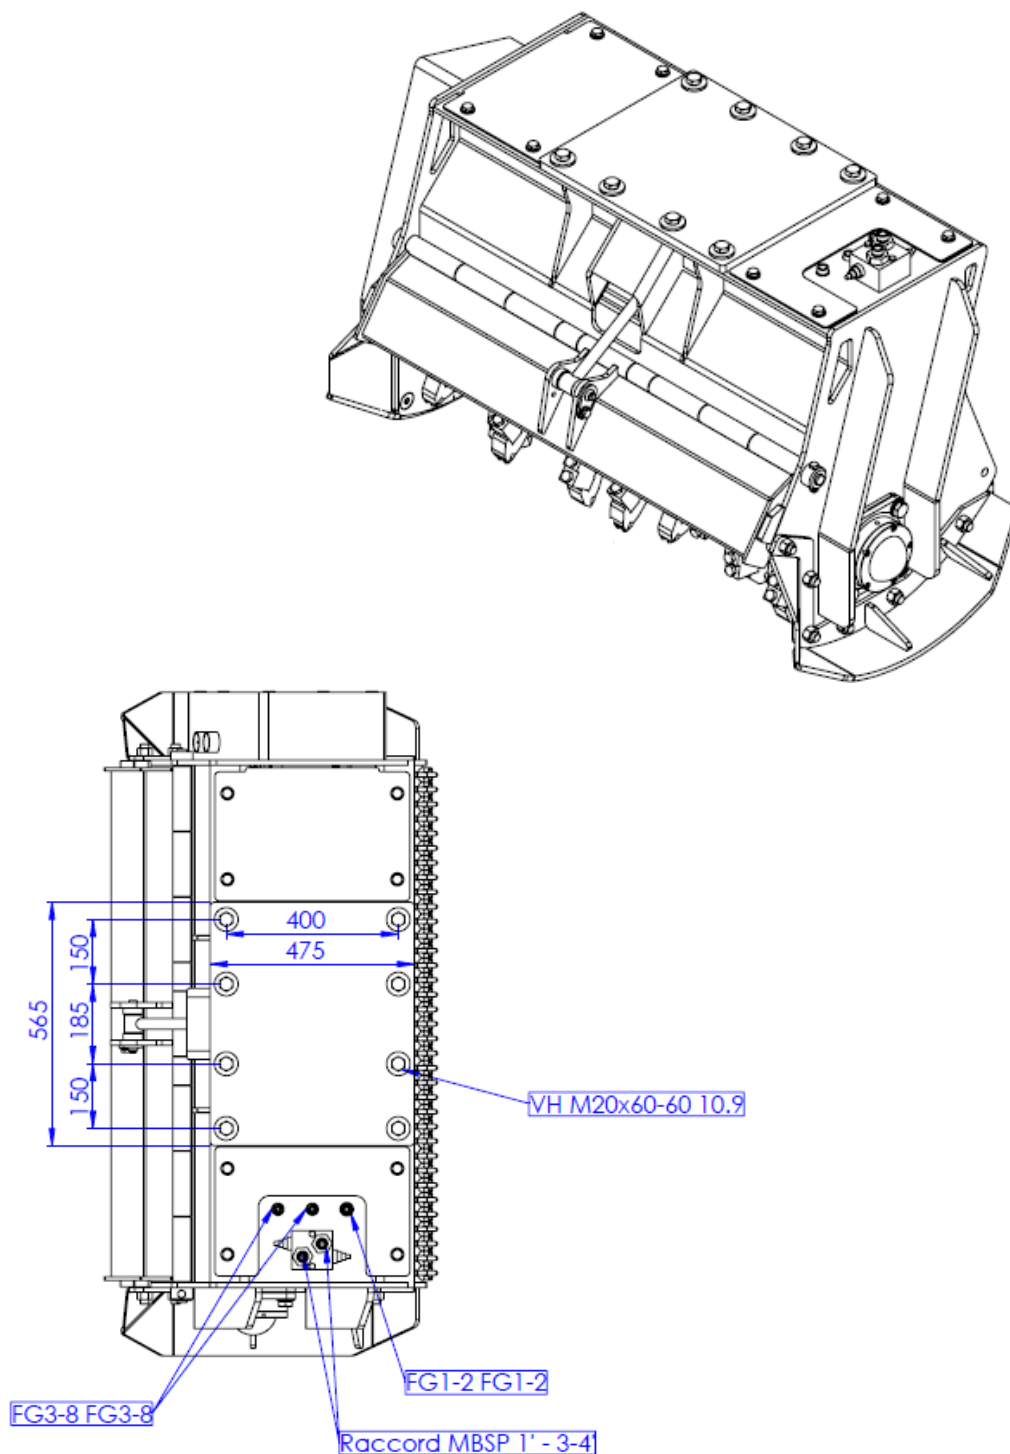

Illustrations and dimensions are for indication only.
PLAISANCE EQUIPEMENTS reserves the right to modify them without notice.
This plan is the property of PLAISANCE EQUIPEMENTS and may not be reproduced or communicated without permission.
All rights reserved.

WEIGHT AND DIMENSIONS (kg and mm)

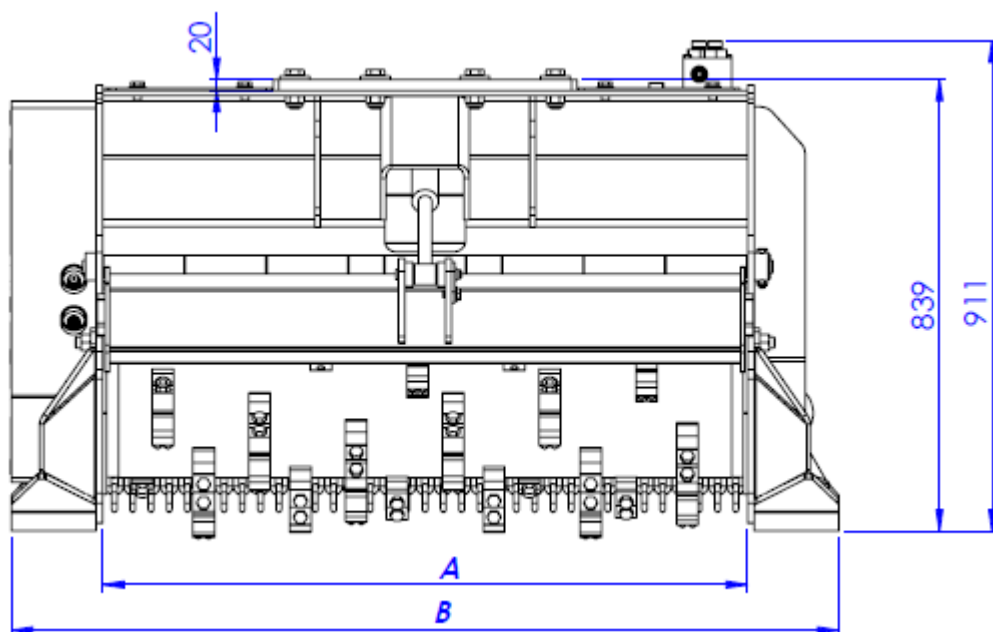

Working width (A)	Overall width (B)	Weight
1000 mm	1340 mm	690 kg
1200 mm	1540 mm	790 kg

