



TECHNICAL DATASHEET GALOTRAX LCP

CONTACT US:

1 Grande rue
54540 MONTIGNY, France
Tél : +33 (0)3 83 42 15 79



WWW.PLAISANCE-EQUIPEMENTS.COM



GALOTRAX LCP

GENERAL INFORMATION

<i>Constructor</i>	PLAISANCE EQUIPEMENTS SAS
<i>Brand</i>	Plaisance
<i>Type</i>	Self-propelled machine
<i>Version</i>	GALOTRAX LCP
<i>Drive</i>	Hydraulic

FEATURES

<i>Advancement</i>	Hydrostatic advancement
	FT type caterpillar
	BONFIGLIOLI gearmotor
	Steering mode: independent tracks
<i>Caterpillars size</i>	Overall width: 1750 mm
	Caterpillar width: 16" (400 mm)
<i>Frame</i>	Self-supporting frame made in steel sheet gathered by welding. Full shielding.
<i>Engine location and layout</i>	On the back, longitudinal
<i>Driver's cab location</i>	Front central position

	ENGINE
<i>Denomination</i>	Manufacturer: PERKINS
	Type: 904J
<i>General description</i>	Inner combustion engine with reciprocating pistons and crankshaft
	Power rating: 135 hp – Engine capacity: 3.6 l
	Cycle: Diesel
<i>Number and disposition of cylinders</i>	4 cylinders in-line
<i>Maximum torque</i>	550 nm at 1500 rotation/min
<i>Maximum rotation speed</i>	2200 rotation/min
<i>Engine power supply mode</i>	Common rail fuel injection
<i>Air filter type</i>	Dry, with cartridges
<i>Ignition</i>	By compression
<i>Engine cooling</i>	By forced water circulation and water cooler

	CAB
<i>Display and control</i>	Full digital display (mulcher rotation, gauges, indicators)
	Advancement control by joystick
<i>Safety</i>	Lexan-Margard® safety glass 12 mm
<i>Equipment</i>	Cab: air-conditioning system, soundproof and high comfort damping system
	Work light: 2 front working lights and 2 rear working lights
	High comfort seat (Public works type) with mechanical suspension

	EXTRA INFORMATION
<i>Fuel type</i>	Diesel
<i>Fuel tank</i>	170 l steel tank on the left side of the frame
<i>Hydraulic tank</i>	80 l steel tank on the right side of the frame
<i>AdBlue tank</i>	19 l on the right side in the hydraulic tank
<i>Optional</i>	Rearview camera / Windshield grid / Winch


MULCHER TECHNICAL DESCRIPTION

BF 301B

MULCHER

Rotor width	1500 mm
Rotor diameter	410 mm
Use	Forestry mulching
Teeth	Special teeth MXCut
Teeth position on the rotor	Fixed - Helical and V positions
Side belt transmission to rotor	1 polychain belt in carbon
Curtain of chains	Anti-projection curtain of chains
Protection door	Hydraulic with two cylinders (public works)
Push bar	Fixed
Frame	Strengthen - High tensile steel
Rolling	Heavy duty roller bearings with double rows of rollers. Made with mass cut steel bearing.
Rotor axis	Bolted shafts
Skids	HARDOX 450® soles
Protections	Anti-wire, bolted and interchangeable cut in mass, chains and metal sheet anti-projection

TEETH



Wood tool
Special teeth




OFMX1




Wood tool
Double carb tip

OF12

PLAN AND DIMENSIONS (mm)

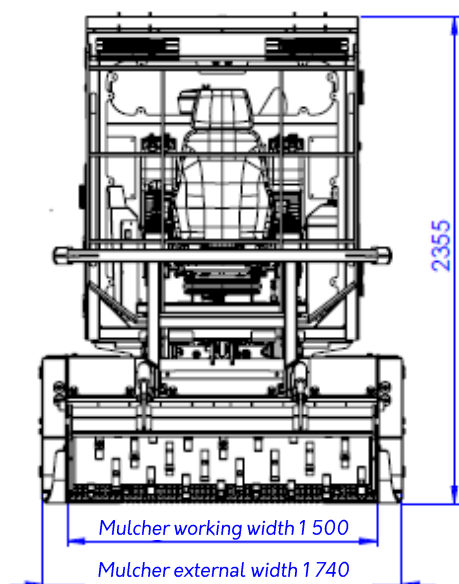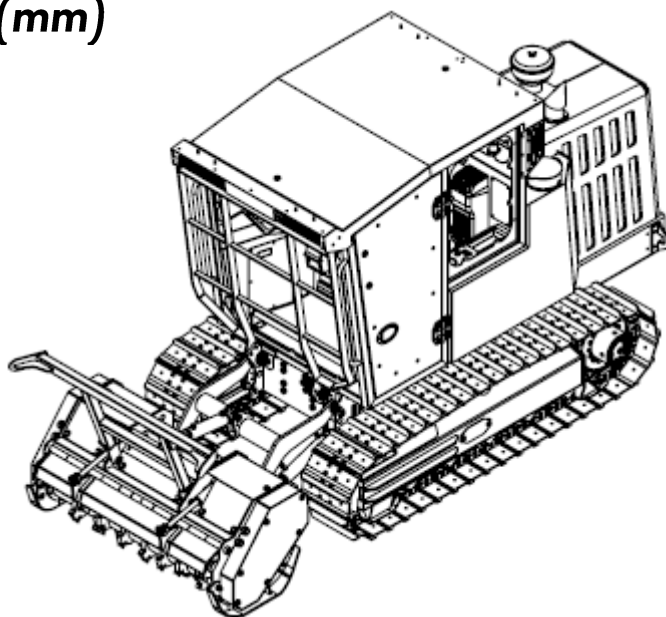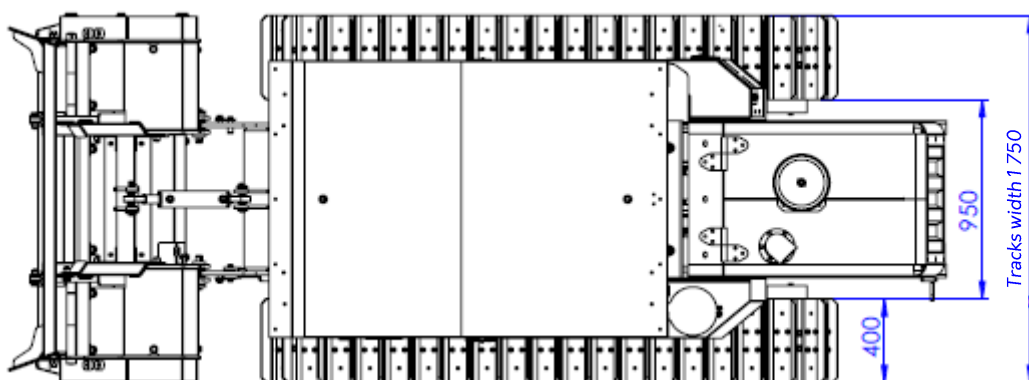

TOTAL WEIGHT:
5 665 kg

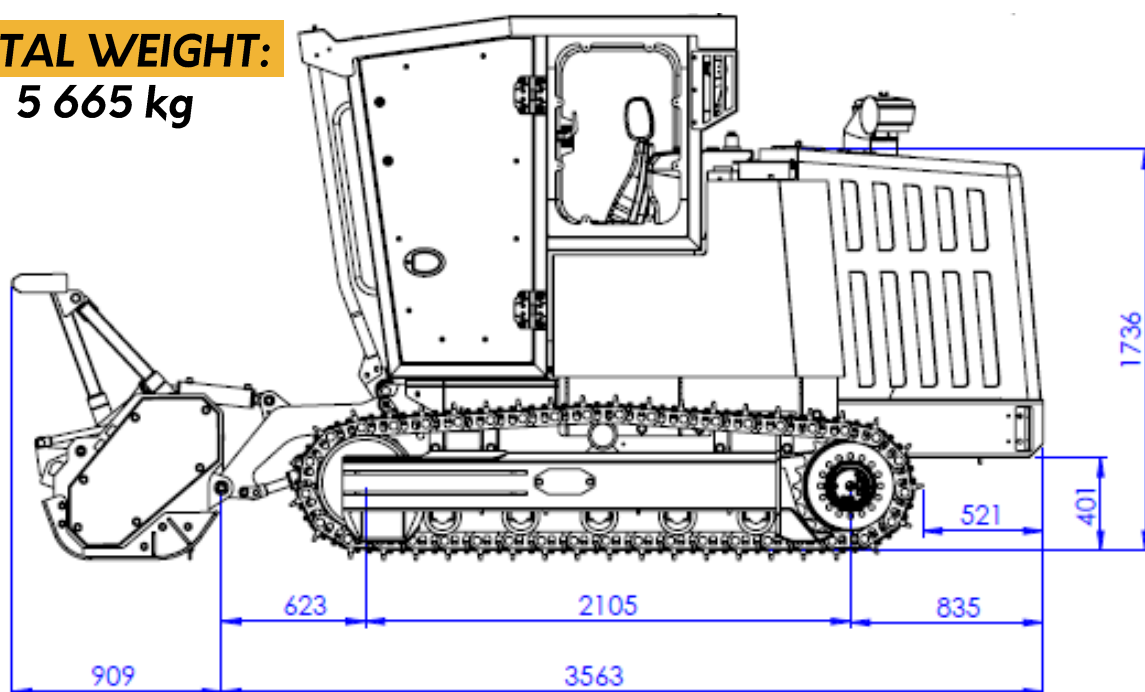



PLAISANCE EQUIPEMENTS
1 Grande rue
54540 MONTIGNY, France
Tel: +33 3 83 42 15 79

CONTROL



VISIBILITY





